


# GLOBE VALVE 200 WOG

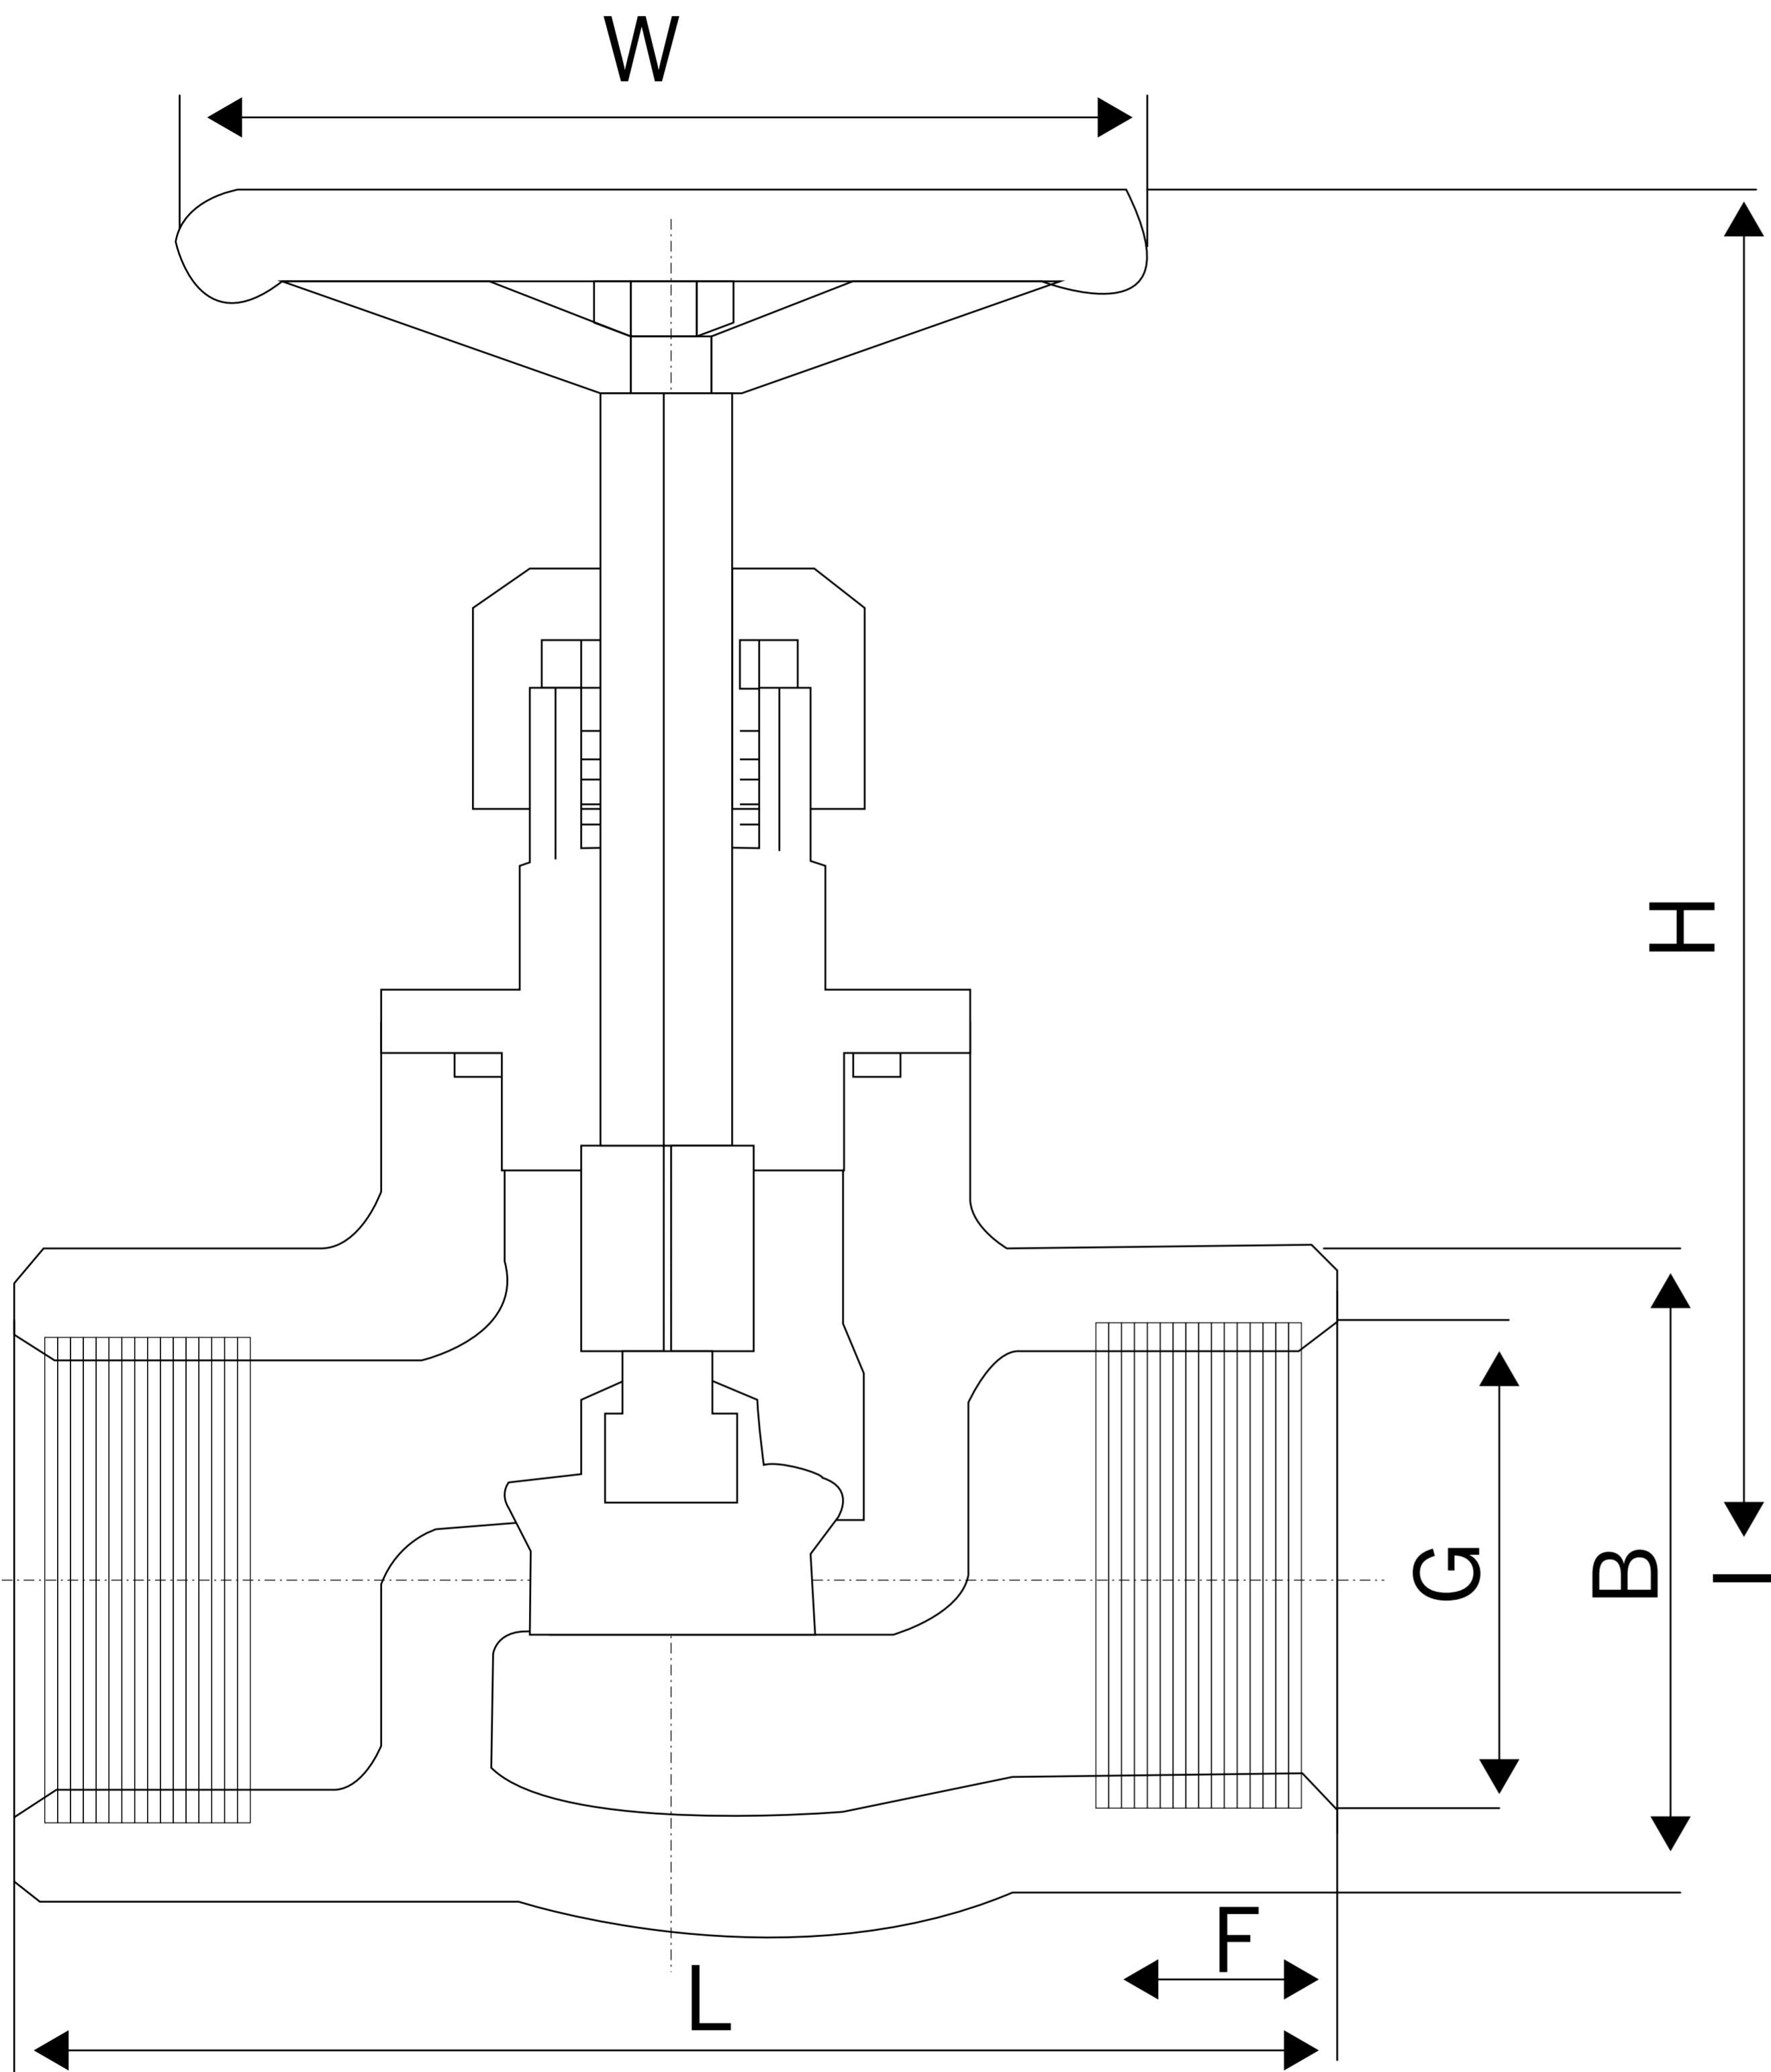

## PART MATERIAL

1	Body	CF8M
2	Bonnet	CF8M
3	Disc	CF8M
4	Stem	CF8M
5	Sealring	PTFE
6	Packing	PTFE

## TECHNICAL REQUIREMENT

Nominal Pressure	PN1.6, 2.5, 4.0, 6.4Mpa
Strength Testing Pressure	PT2.4, 3.8, 6.0, 9.6Mpa
Seat Testing Pressure(Hight Pressure)	1.8, 2.8, 4.4, 7.1Mpa
Applicable Media	J11W - (16-54)Cwater, Oil, Gras J11W - (16-64)Nitric Acid J11W - (16-64)Acetic Acid
Applicable Temperature	- 40~180° C

## DIMENSION

DN	G	L	E	B	H	W
6	1/4"	68	15	23	80	70
10	3/8"	68	15	26	80	70
15	1/2"	68	16	31	88	70
20	3/4"	82	18	38	95	70
25	1"	90	20	46	110	80
32	1 1/4"	102	21.5	56	123	100
40	1 1/2"	122	23	63	135	100
50	2"	138	24.5	76	150	100

[WWW.VANECO.COM.PE](http://WWW.VANECO.COM.PE)

Email: [ventas@vaneco.com.pe](mailto:ventas@vaneco.com.pe)

Oficina: Av. Andrés Razuri 207 Urb. Maranga San Miguel

Almacén Principal: Avenida Nicolas Ayllón 2635 – Interior C3

Central telefónica: (511) 5170130  948544608