


2PC BALL VALVE (STANDAR PORT) CLASS 2000/1500

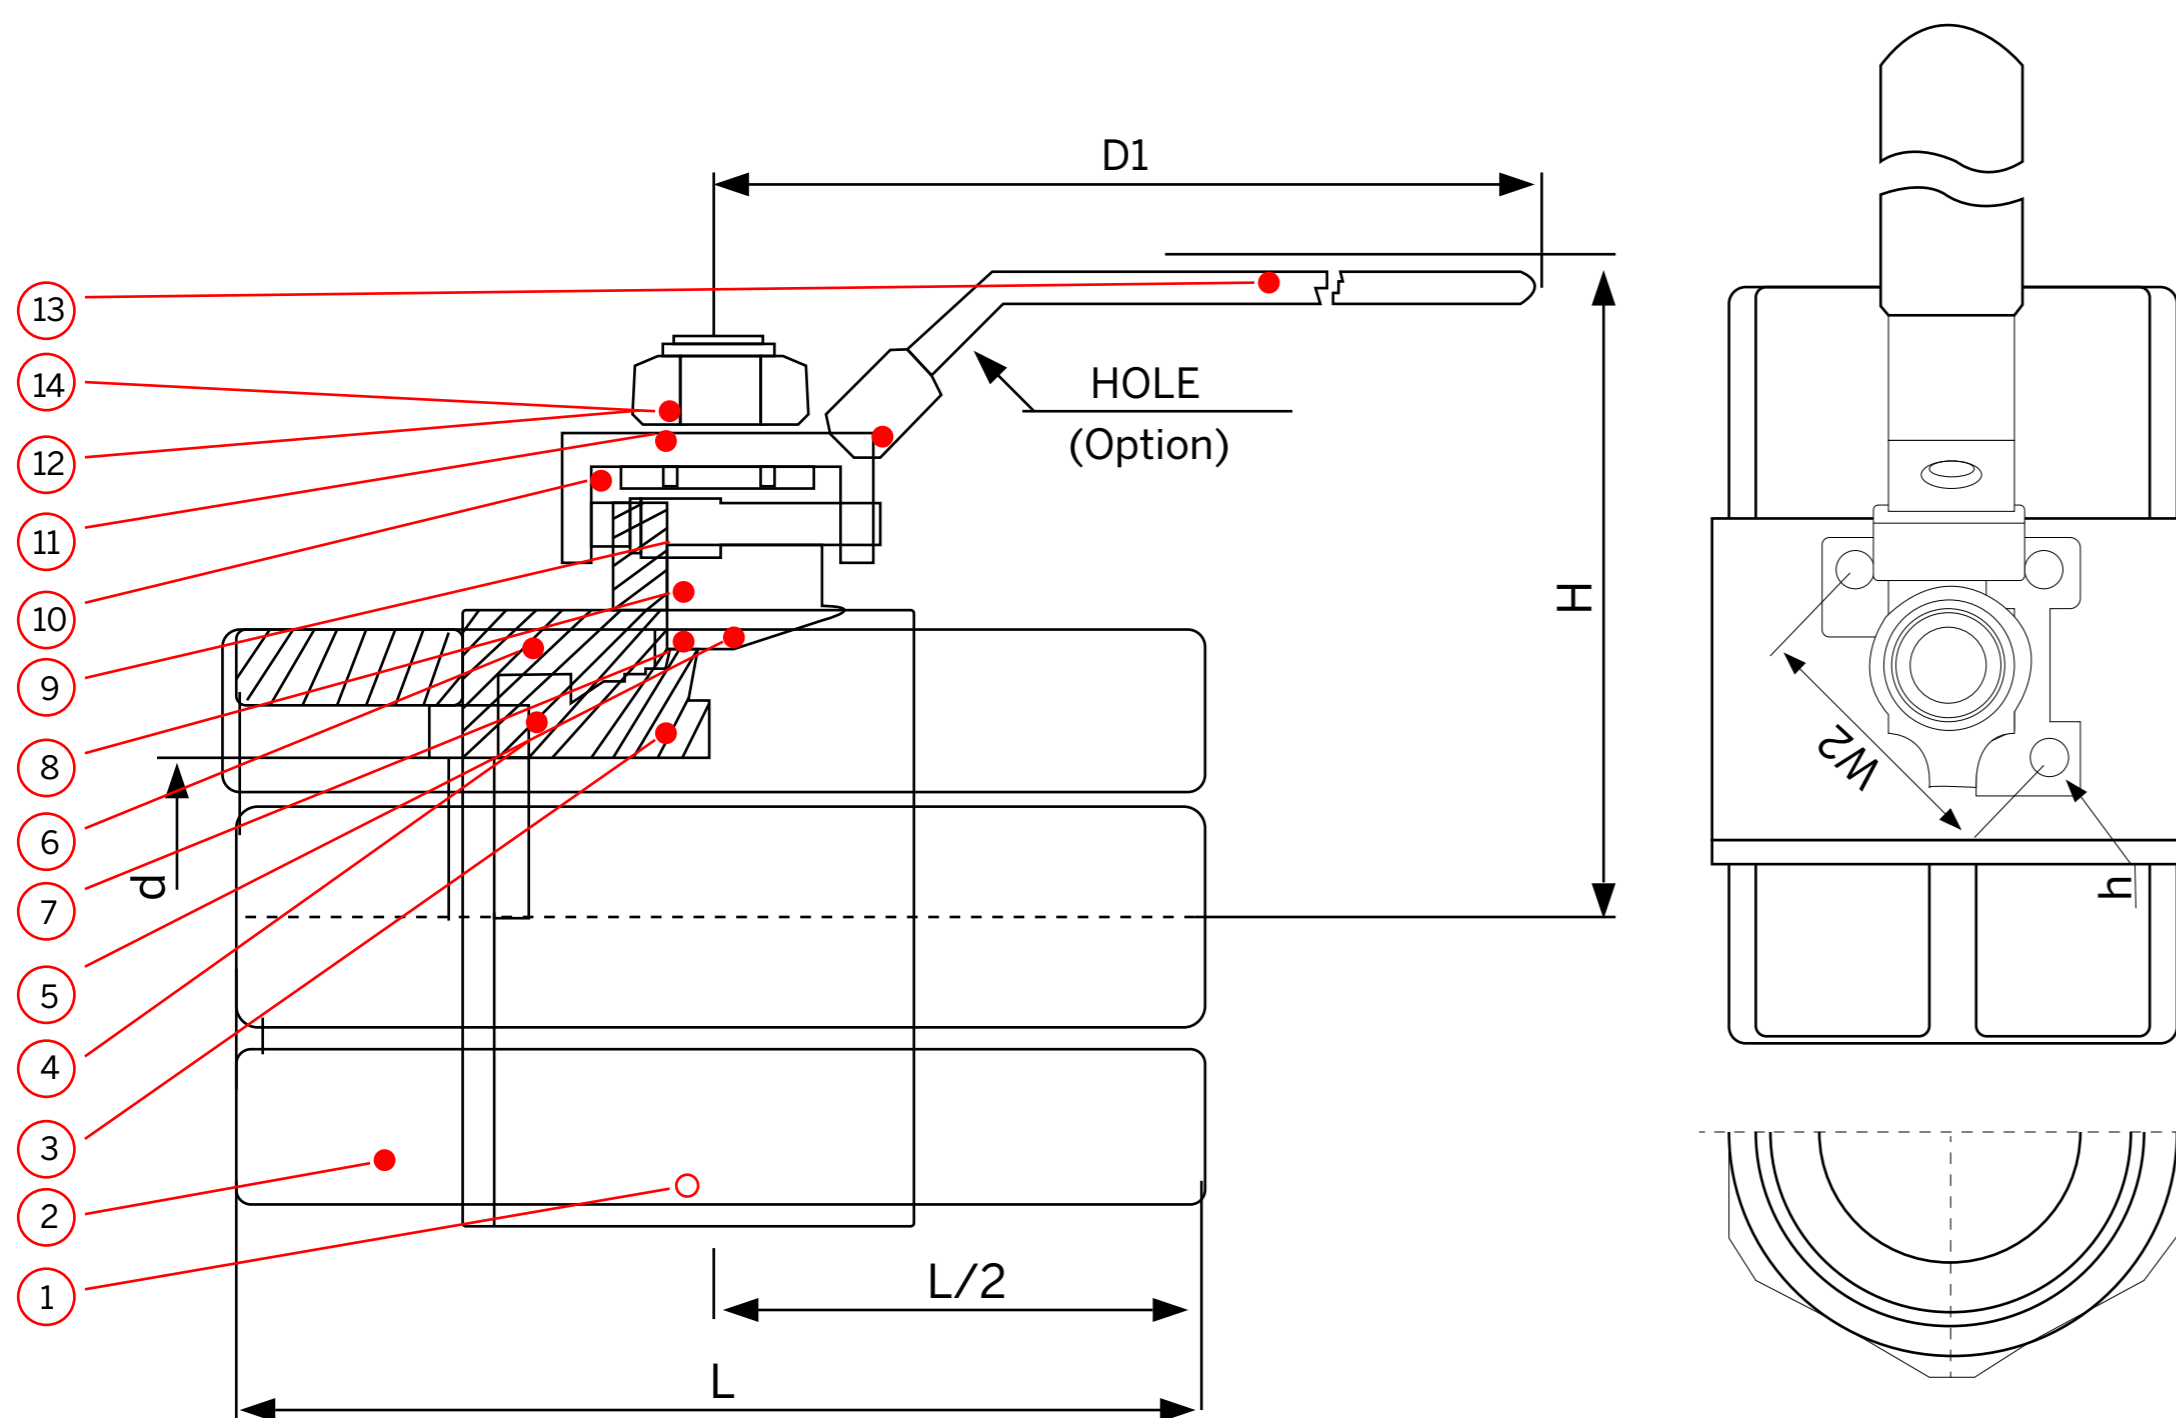

PART MATERIAL

1	Body	ASTM A351Gr.CF8M
2	Cap	ASTM A351Gr.CF8M
3	Ball	ASTM A351Gr.CF8M
4	Stem	ASTM A276 Gr.316
5	Seat	PTFE+15% G/F
6	Gasket	PTFE
7	Thrust Washer	PTFE
8	Packing	PTFE
9	Gland	SS304
10	Handle	SS304
11	Handle Washer	SS304
12	Handle Nut	SS304
13	Handle Sleeve	VINYL GRIP
14	Locking Plate	SS304

DESIGN FEATURES

2000WOG-1/4" 1", 1500WOG-1 1/4" 2"
STANDAR PORT
BLOW-OUT PROOF STEM
EASY ACTUATOR MOUNTING
REINFORCED PTFE
WITH DIN 50049-3.1b WORKS CERTS
OPTIONS: LOCKING DEVICE

DIMENSION


Size		d		L		D1		H		W2		h	Cv Factor
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm		
1/4"	8	0.43	11	0.61	16	2.28	2.28	1.1	28.8	2.3	57	M5 X PO.8	6
3/8"	10	0.49	13	0.61	16	2.28	2.28	1.1	28.8	2.3	57	M5 X PO.8	12
1/2"	15	0.59	15	0.57	15	2.43	2.43	1.2	30.7	2.3	59	M5 X PO.8	19
3/4"	20	0.79	20	0.83	21	2.76	2.76	1.4	35	2.5	63	M5 X PO.8	37
1"	25	0.98	25	0.77	20	3.2	3.2	1.6	40.2	2.8	71	M5 X PO.8	64
1 1/4"	32	1.26	32	1.09	28	3.78	3.78	1.9	47.2	3	76	M6 X P1.0	103
1 1/2"	40	1.5	38	1.5	28	4.43	4.43	2.2	55.6	3.5	89	M6 X P1.0	143
2"	50	2	51	1.08	27	4.96	4.96	2.5	62.4	3.9	98	M6 X P1.0	360
2 1/2"	65	2.56	65	1.02	26	6.63	6.63	3.4	85	4.4	111	M6 X P1.0	440
3"	80	3.15	80	1.5	38	7.54	7.54	3.8	95.9	4.9	124	M6 X P1.0	520

WWW.VANECO.COM.PE

Email: ventas@vaneco.com.pe

Oficina: Av. Andrés Razuri 207 Urb. Maranga San Miguel

Almacén Principal: Avenida Nicolas Ayllón 2635 – Interior C3

Central telefónica: (511) 5170130  948544608