


LONG RADIUS 90° ELBOWS

SCHEDULE 40

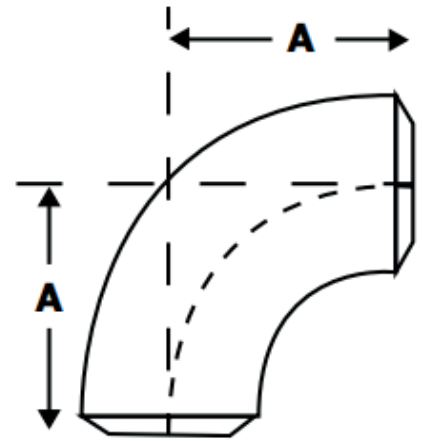

| NOMINAL PIPE SIZE (mm) | OUTSIDE DIAMETER (mm) O.D | INSIDE DIAMETER (mm) I.D | WAL THICKNESS (mm) Espesor de pared | CENTER TO END (A) (mm) | APPROXIMATE WEIGHT (in Kg) |
|------------------------|---------------------------|--------------------------|-------------------------------------|------------------------|----------------------------|
| 1/2" | 21.3 | 15.8 | 2.77 | 38 | 0.08 |
| 3/4" | 26.7 | 20.93 | 2.87 | 29 | 0.11 |
| 1" | 33.5 | 26.64 | 3.38 | 38 | 0.16 |
| 1 1/4" | 42.2 | 35.05 | 3.56 | 48 | 0.26 |
| 1 1/2" | 48.3 | 40.89 | 3.68 | 57 | 0.37 |
| 2" | 60.5 | 52.5 | 3.91 | 76 | 0.66 |
| 2 1/2" | 73.2 | 62.71 | 5.16 | 95 | 1.37 |
| 3" | 88.9 | 77.93 | 5.49 | 114 | 2.04 |
| 4" | 114.3 | 102.26 | 6.02 | 152 | 3.84 |
| 5" | 141.2 | 128.19 | 6.55 | 190 | 6.48 |
| 6" | 168.1 | 154.05 | 7.11 | 229 | 9.94 |
| 8" | 218.9 | 202.72 | 8.18 | 305 | 20.1 |
| 10" | 273.1 | 254.5 | 9.27 | 381 | 35.4 |
| 12" | 323.9 | 304.8 | 9.53 | 457 | 57 |
| 14" | 355.9 | 336.6 | 9.53 | 533 | 79.1 |
| 16" | 406.4 | 386.1 | 9.53 | 610 | 118 |
| 18" | 457.2 | 438.2 | 9.53 | 686 | 169 |
| 20" | 508 | 489 | 9.53 | 762 | 220 |
| 22" | 558.8 | 539.8 | 9.53 | 838 | - |
| 24" | 609.6 | 590.6 | 9.53 | 914 | 366 |